

FEEDER MACHINE

AMFLEX

1 or 2 lanes feeder with 2,3 or 4 stations



Ergonomic 2, 3 or 4 stations, 1 or 2 lane feeder

Specifications

Standard Features

- High quality feeder
- Suction under feeding belts
- Automatic speed synchronisation with the ironer
- Touchscreen panel
- 100 free programmable programs
- Adjustable spreading tension per program
- Adjustable clamp heights
- Automatic start of the clamp
- Inlet rollers above the suction box
- Preparation for M.I.S
- Photocells face down
- Spreading knife in suction box
- Spreading brushes in suction box
- Acoustical warning alarm
- Servo controlled spreading
- Inlet conveyor speed reduction

Optional

- Working width up to 4100mm
- Adjustable vacuum suction box
- Stretch conveyor
- Ironer protection
- Inspection light in front of machine
- Stain and tears
- Automatic ironer speed control from feeder
- Lifting device
- Spare parts kit
- Special colour
- Other options on request

Technical information

Specifications

Electrical

- Voltage : 3x 400V+N+PE / 50Hz
- Power : 3kW, Fuses 16A

Pneumatic

- Pressure : 6 - 10 Bar
- Consumption : 3.000NI/1000 sheets
- Connection : 3/8" (1/2" tube)

Miscellaneous

- Noise level : 75dBA
- Speed : 8 up to 50 m/min




Production Materials Sheets

- Sheets, table linen, draw sheets, etc.
- Max. size 1 lane : 3,3m x working width
- Min. size 1 lane : 0,9m x 0,9m

E (Economic) - 2, 3 of 4 stations sheet feeder

P (Standard quality) - 2, 3 or 4 stations feeder for sheets, duvets etc.

Q (High Quality) - 2, 3 or 4 stations feeder, for large piece and small pieces

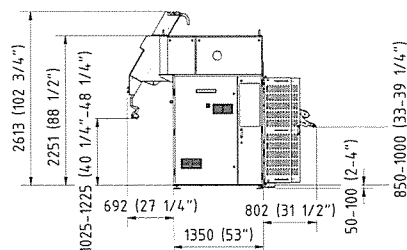

	Working width A	C	B1	B2	D
1 lane	3000 [118 1/8"]	4170 [164 1/5"]			3 = 1200 (47 1/4") - 4 = 950 (37 1/2")
	3300 [130"]	4370 [164 1/5"]			3 = 1200 (47 1/4") - 4 = 950 (37 1/2")
	3500 [137 4/5"]	4620 [181 7/8"]			3 = 1425 (56") - 4 = 950 (37 1/2")
	3700 [145 2/3"]	4620 [181 7/8"]			3 = 1425 (56") - 4 = 950 (37 1/2")
2 lane	3000 [118 1/8"]	4682 [184 1/4"]	1500 [59"]	1500 [59"]	3 = 1200 (47 1/4") - 4 = 950 (37 1/2")
	3300 [130"]	4682 [184 1/4"]	1550 [65"]	1650 [65"]	3 = 1200 (47 1/4") - 4 = 950 (37 1/2")
	3500 [137 4/5"]	5070 [199 1/2"]	1725 [68"]	1725 [68"]	3 = 1425 (56") - 4 = 950 (37 1/2")
	3700 [145 2/3"]	5070 [199 1/2"]	1875 [73 4/5"]	1875 [73 4/5"]	3 = 1425 (56") - 4 = 950 (37 1/2")

We reserve the right to modify this product or specifications without prior notice

ACCURATE TECHNOLOGIES CO.,LTD Bangkok,Thailand

Phone : +66(0)2740-5511 (Auto) Fax : +66(0)2740-5522,2740-5533

www accuratethai.com Email : sales@accuratethai.com